

PACO LCS

End Suction Split-Coupled pump that's simple, compact, and efficient




Key Benefits:

- 35% smaller foot print over frame mount design
 - Eliminates coupling alignment requirements, laser alignment costs and faster installation
 - No baseplate grouting required
 - Service friendly design allows rapid mechanical seal access without motor removal, thus reducing maintenance cost
 - Lower weight offers installation ease
-

For consulting engineers, visit **GrundfosExpress.com** for technical information. For Grundfos sales and distributors, visit **GrundfosExpressSuite.com**

www.grundfos.us/LCS

PACO LCS Technical Data

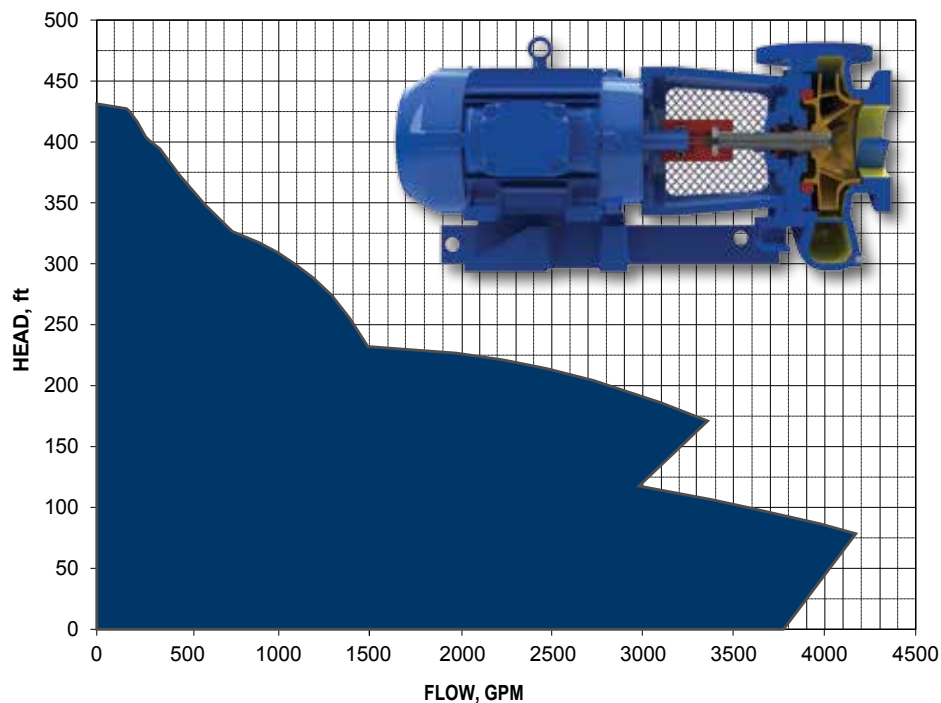

Visit grundfosexpresssuite.com

	PACO LCS
Flow, Q	10 to 4200 gpm
Head, H	15 to 430 ft
Fluid temp.	10° to 275° F
Max. working pressure	175 psi*
HP range	3 to 125 hp
Speed	3600, 1800, and 1200 RPM
Discharge/Suction sizes	1.25 to 8 in.

* 250 psi rating available

L-LCS-SL-01 07-14 (US)

GRUNDFOS CBS Inc.
902 Koomey Road
Brookshire, TX 77423
Phone: (281) 994-2700
Fax: (559) 347-2702

GRUNDFOS Canada
2941 Brighton Road
Oakville, Ontario
L6H 6C9
Phone: (905) 829-9533
Fax: (905) 829-9512

GRUNDFOS Mexico
Boulevard TLC No. 15
Parque Industrial Stiva Aeropuerto
C.P. 66600 Apodaca, N.L. Mexico
Phone: 011-52-81-8144 4000
Fax: 011-52-81-8144 4010

www.grundfos.us

The name Grundfos, the Grundfos logo, and be think innovate are registered trademarks owned by Grundfos Holding A/S or Grundfos A/S, Denmark. All rights reserved worldwide.

GRUNDFOS